


Control combiner cabinet parameter

Dimension	Panel color	IP grade	Incoming and Outgoing line method	Maximum support current	Battery cluster	Dielectric strength level
800*600*2060 (MM)	RAL7035	IP20	Bottom in	1600A	16	1500V

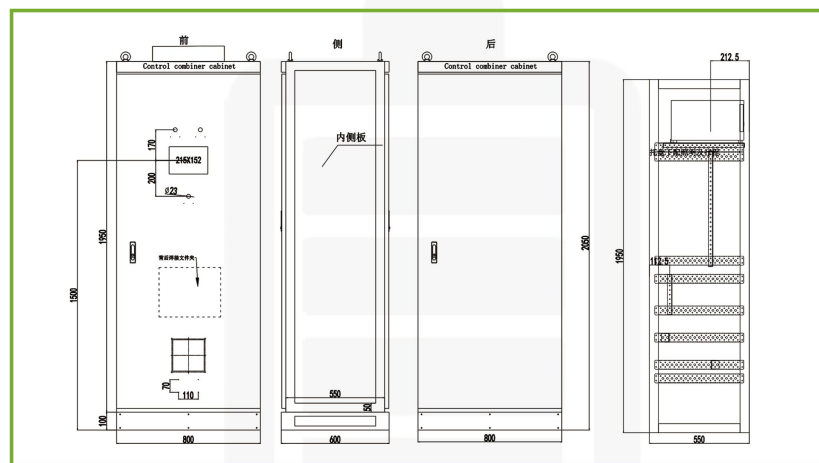

-  Antiseptic and antirust
-  Good heat dissipation
-  Spraying process
-  OEM&ODM
-  Quality assurance